






## AUTOFLOW INSTALLATION AND OPERATING INSTRUCTIONS


The Autoflow Wall Kit can be mounted to all available fresh air ducts.

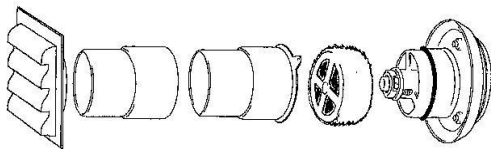

The packing holds the ventilator together in its place. No need for screws if original ducting is used.



REFERENCE	Ø
AUTOFLOW 80	85mm
AUTOFLOW 100	105mm
AUTOFLOW 160	165mm




### Function Instruction

The Autoflow Wall Kit has a self contained temperature sensitive and self regulating thermostat which regulates the ventilator disc and adjusts the air gaps and the amount of fresh air to the outdoor temperature. In the default setting, the air supply decreases with falling outdoor temperature and increases with rising outdoor temperature.


If the ventilator is in its default setting, the fresh air supply decreases gradually down to about -5° C. When the temperature rises, the ventilator opens gradually and is fully open at about +10° C.

The ventilator setting can be adjusted to any ventilator requirement. Simply turn the ventilator's disc from its basic position, clockwise if you want to close earlier and anticlockwise if you want it more open all the time.

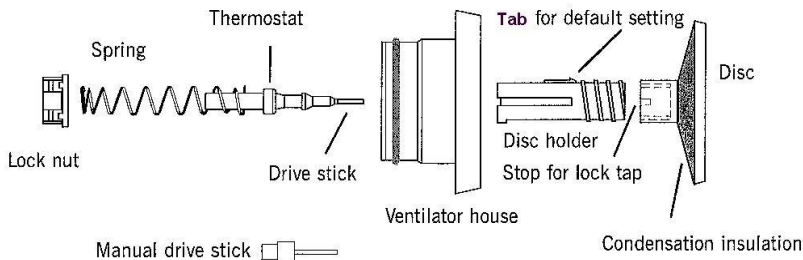

### Mounting of spacing washers for the required minimum air flow

- Turn the ventilator disc anti-clockwise and screw it off.
- Mount spacing washers on the disc holder until the required gap opening is achieved and then add 2 mm (the cusps of the washers should run in the groove of the disc holder).
- Spacing washers are available in 2 and 4 mm thickness. One 4 mm spacing washer gives 2 mm gap opening. One 4 mm and one 2 mm spacing washer gives 4 mm gap opening.
- Turn the ventilation disc back to its default setting.

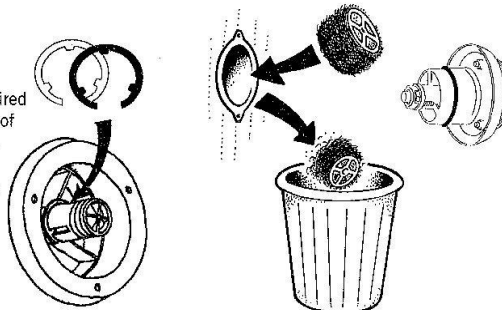

### Filter replacement

At 1-3 years interval, depending on air quality and placement. Green filterside towards ventilator.

## Do's and don'ts

- Do read all the instruction leaflet before commencing installation.

## Guarantee

### Customers outside UK – see international below.

- UK: The ventilator is guaranteed against defects for 2 years from the date of purchase.
- Please keep your purchase receipt.
- If you have any problems, contact Xpelair's Head Office at the address shown below.

## Technical advice and service

### Customers outside UK – see international below.

UK: Xpelair have a comprehensive range of services including:

- Free technical advice help-desk from Engineers on all aspects of ventilation
- Free design service, quotations and site surveys
- Service and maintenance contracts to suit all requirements.

### Please ask for details:

- By telephone on Techline: +44 (0) 8709 000430
- By fax on Techfax: +44 (0) 8709 000530
- At the address below

## International

- Guarantee: Contact your local distributor or Xpelair direct for details.
- Technical Advice and Service: Contact your local Xpelair distributor




# AUTOFLOW 100 WALL KIT

Product No.

**91296AW**

Weight: 0.61kg

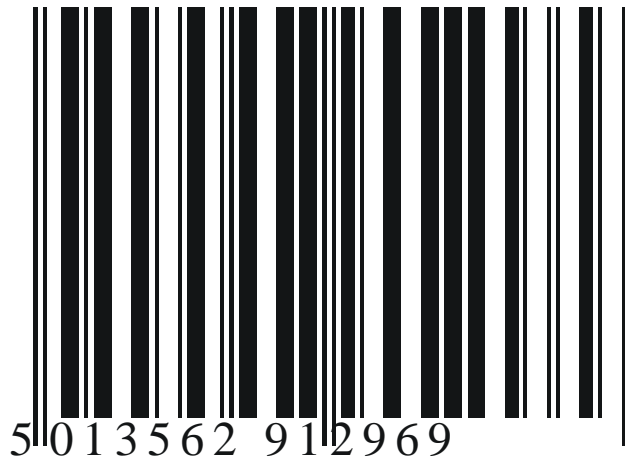

Applied Energy Products Ltd  
Morley Way  
Peterborough  
PE2 9JJ

t 01733 456789  
f 01733 310606  
www.applied-energy.com

Xpelair is a registered trademark of Applied Energy Products Limited.  
Applied Energy Products reserve the right to alter product specifications  
or appearance without prior notice. All finishes and diagrams in this  
booklet are as accurate as printing processes allow.